

Preferences

SIP Peering

SIP Peering

SIP Peering (also called SIP Trunking) enables you to statically connect your IP-PBX public interface (WAN IP) with our public IP while we in turn limit access to your nominated static IP.

NB – Peering differs from SIP Registration which relies on an authenticated UserName, Password to connect to our voice proxy.

Once you have enabled SIP Peering we whitelist your WAN IP blocking any other IP from communicating with our Voice service. To harden your public IP address from unauthorised intrusion we advise restricting access to your SIP port to our public IP.

We support two modes of Peering:

- **Global:** All Inbound and Outbound traffic is routed to a single nominated WAN IP
- **Single:** A single DID is linked to your nominated WAN IP

Quick Guide

Step 1: Enabling a global SIP Peer

1. Log into <https://now.tel2.co.uk>.
2. Select **Cloud PBX** > select number > **Preferences** > **SIP Peering**
3. Click **Enable SIP peering**
4. Add Primary Trunk Host IP Address, and failover Trunk IP Address (Note: this is optional)

Preferences

Exception Route

An Exception Route covers the scenario where you have a main office holding the majority of phone numbers and a regional office with its own WAN IP. The Exception Route is therefore a convenient mechanism that enables you to attach an alternate Peering IP to that the regional office (for example).

Preferences Your First Demo Customer

SIP Peering

If you have an IP PBX directly connected to the Internet you configure your account as a SIP peer (Advanced users):

☐ Enable SIP peering on this account and make this number my pilot number

Primary Trunk Host IP Address:

Fall-over Trunk Host IP Address (optional):

Exception route (optional)
(Instead of routing calls to the Primary trunk host IP, you may specify a different IP address for call routing for this area (optional))

☐ Handle SIP trunk signalling as behind NAT (Ignoring Private IP addressing in Contact/SDP and UA headers etc.)

☐ Do not reset my line settings when enabling my SIP trunk


NOTE: Unless you tick the box above, the following will happen to each line on your account the very first time (and only the first time) that you enable SIP trunking:

- All settings on each line are reset to their default values
- Voicemail is disabled on each line
- Display Name feature is disabled on each line
- Call Recording is disabled on each line
- Call transfer features are disabled on each line

Step 2: Single Peer

Preferences

1. Log into <https://now.tel2.co.uk>.
2. Click on **Cloud PBX** on top menu
3. **Line Number Select** page will appear
4. Click **Peering** field for the number you wish to set up
5. Add Primary Trunk Host IP Address, and failover Trunk IP Address (Note: this is optional)

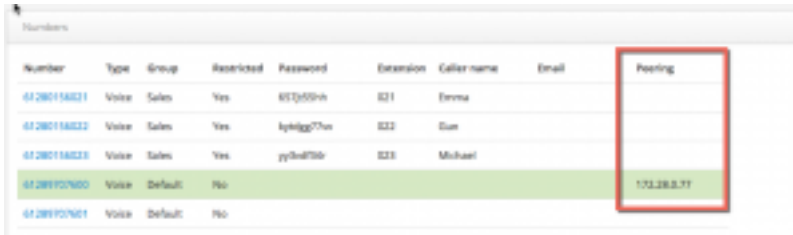

Number	Type	Group	Restricted	Password	Extension	Caller name	Email	Peering
07200156221	Voice	Sales	Yes	6T3j55rh	021	Emma		
07200156222	Voice	Sales	Yes	lyHkgO7u	022	Sam		
07200156223	Voice	Sales	Yes	py3nd750	023	Michael		
07200156220	Voice	Default	No					173.38.3.77
07200156224	Voice	Default	No					

Unique solution ID: #1037

Author: Support

Last update: 2018-01-25 17:16