

# Device Provisioning

## Gigaset Cordless IP Phones - Manual Configuration


### Gigaset Cordless IP Phones - Manual Configuration

This KB is limited to the Gigaset family of cordless (DECT) handsets.



#### Configuring the phone via the Web configurator

We recommend using the base stations web user interface to configure each handset.

- Establish the telephone's current IP address on the handset
- Control button on right side of handset
- Settings (spanner icon)
- Registration

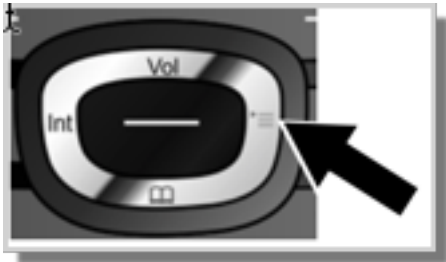

# Device Provisioning

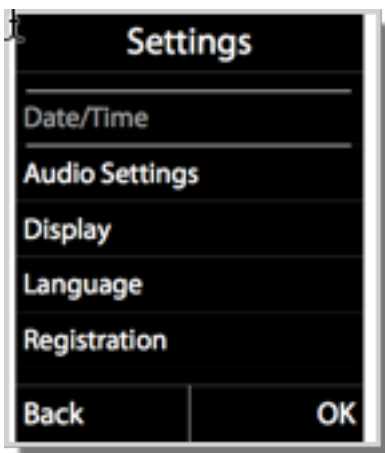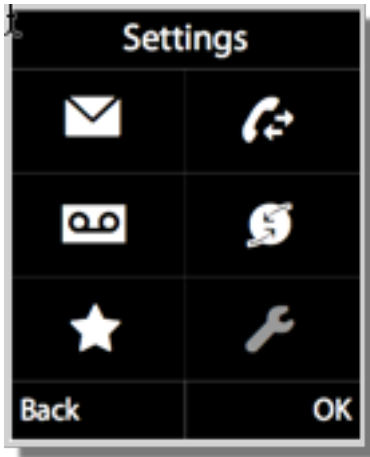

- Enter `http://` and the telephone's current IP address (for example: `http://192.168.2.2`) into the address field of the Web browser.
- Press the return key.
- A connection is established to the phone's Web configurator.

On the Web UI follow the steps below


Page 2 / 4

(c) 2022 Support <[support@tel2.co.uk](mailto:support@tel2.co.uk)> | 2022-07-05 05:59

URL: <https://faq.tel2.co.uk/index.php?action=artikel&cat=18&id=81&artlang=en-us>

# Device Provisioning

- Login default password: 0000
- Select: **Settings** | **Telephony** | **Connections**
- Select Edit the required extension
- Personal Provider Data
  - Authentication Name: <your phone number> (e.g. 442034567890)
  - Authentication Password: <your password>
  - User name: <your phone number> (e.g. 442034567890)
- General Provider Data
  - Domain: phone.tel2.co.uk
  - Proxy server Port: 5060
  - Register server: phone.tel2.co.uk
  - Refresh Registration: 180 seconds
  - Save settings: **SET**

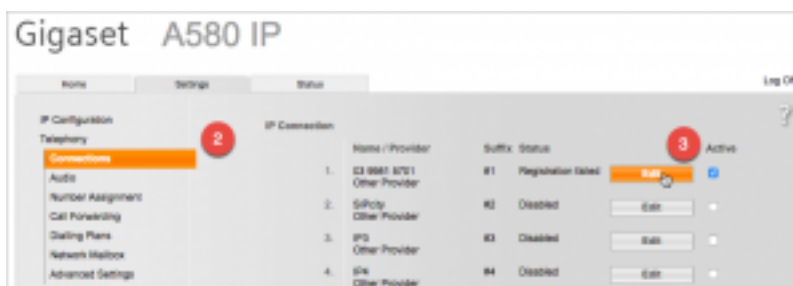

# Device Provisioning

1. IP Connection

You can replace the default name with a name or the actual phone number to distinguish this connection.

Connection Name or Number: 02 8071 8624

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code:

Start Auto Configuration

Provider: Other Provider Select VoIP Provider

Personal Provider Data

Authentication Name: 01280718624 4

Authentication password: \*\*\*\*\*

Username: 01280718624

Display name: Ext 624

Hide Advanced Settings

General Provider Data

Domain: call.sipcity.com.au 5

Proxy server address:

Proxy server port: 5060

Registrar server: call.sipcity.com.au

Registrar server port: 5060

Registration refresh time: 180 sec

Network

STUN enabled:  Yes  No

**NB** - the Gigaset are typically slow to acknowledge the handsets registration and can take 30 seconds to change status to **Registered**.

Unique solution ID: #1080  
Author: Support  
Last update: 2016-05-29 08:24